


FAEMA

X20 Fresh Brew

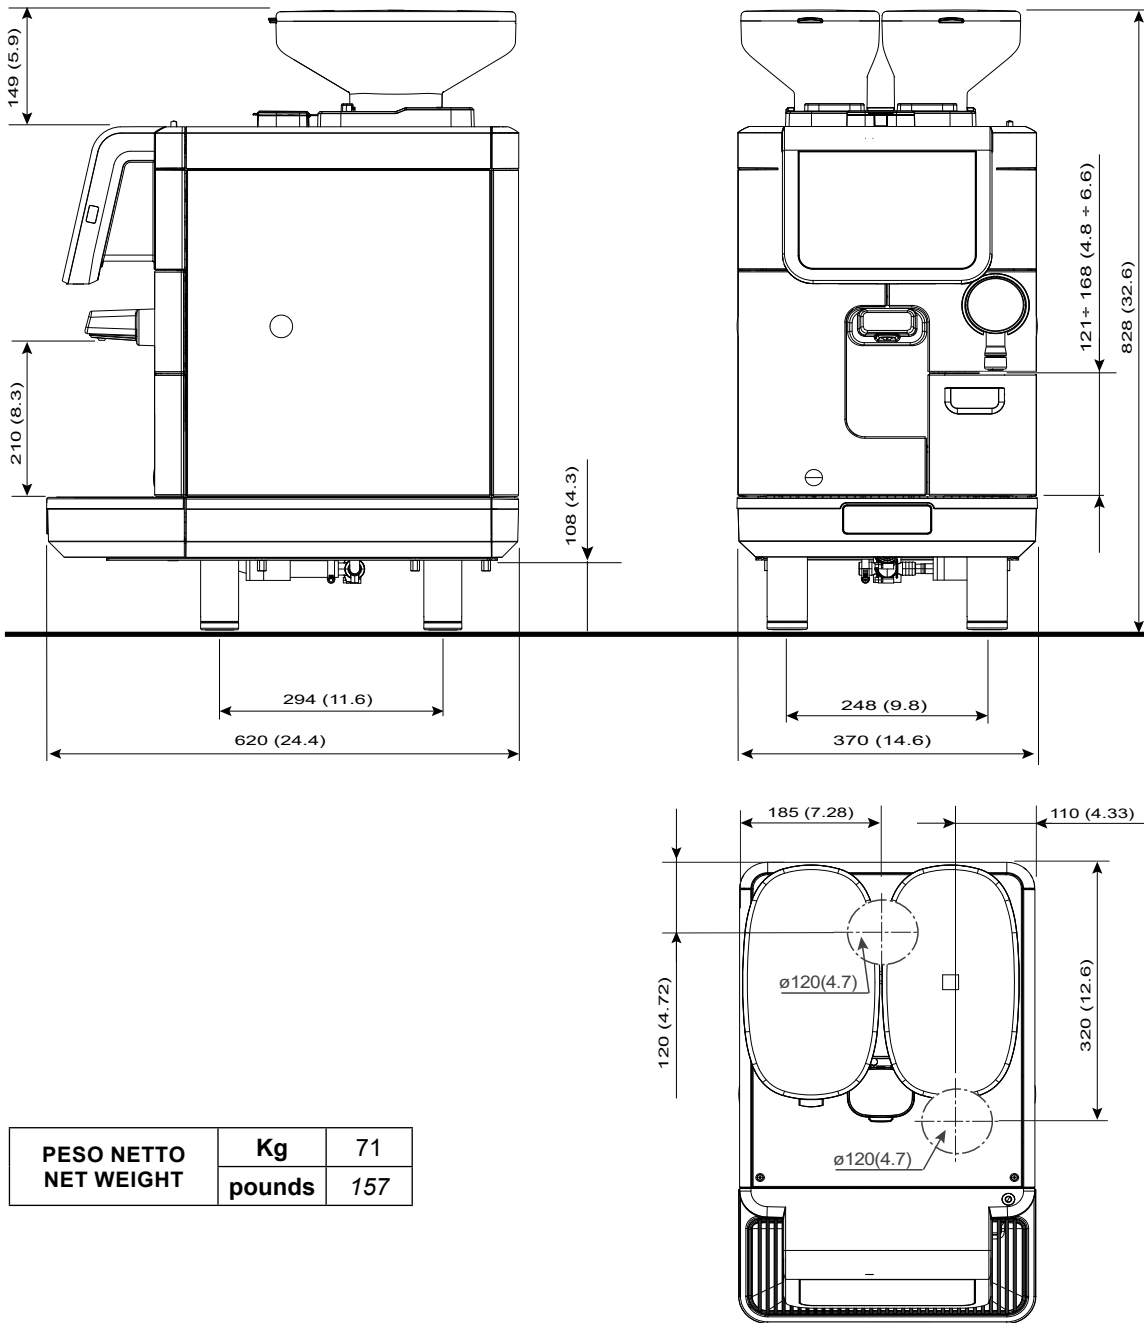

PESO NETTO NET WEIGHT	Kg	71
	pounds	157

MACCHINA MACHINE	ALIMENTAZIONE ELETTRICA POWER SUPPLY	POTENZA INSTALLATA INSTALLED POWER	CORRENTE DI LINEA LINE POWER	SEZIONE CAVO ALIMENTAZIONE SUPPLY CABLE SECTION
X20 FRESH BREW	220 - 240 V 50 Hz 220 V 60 Hz	3.9 - 4.6 kW 4.1 kW	20 A	3 x 1,5 mm ²
	220 - 240 V 50 Hz 220 V 60 Hz	2.8 - 3.3 kW 3.1 kW	14 A	3 x 1,5 mm ²
	220 - 240 V 50 Hz 220 V 60 Hz	2.5 - 3.0 kW 2.5 kW	13 A	3 x 1,5 mm ²
	208-240 60 Hz	3.5 - 4.6 kW	20 A (30 A plug)	3 x 12 AWG

INTERRUTTORE	- Omnipolare con distanza di apertura contatti 3 mm - Protezione da corrente di dispersione con valore pari a 30 mA	SWITCH	- Omnipolar, 3 mm opening contact distance - Protection from leakage current with a value equal to 30 mA
MESSA A TERRA	- Obbligatoria	GROUNDING	- Required
ALLACCIAMENTO IDRAULICO	- $\varnothing$ 3/8 gas	HYDRAULIC CONNECTION	- $\varnothing$ 3/8 gas
PRESSIONE DI ALIMENTAZIONE IDRAULICA	- 1 + 6 bar (0.6 MPa)	HYDRAULIC FEEDING PRESSURE	- 14,5 + 87 psi - 1 + 6 bar (0.6 MPa)
SCARICO IDRAULICO	- $\varnothing$ min. 50 mm	WATER DISCHARGE	- $\varnothing$ min. 2 inches - 50 mm