PRESIDENT – GTi

FAEMA
THE ART MACHINE

MODEL:	SKU:
FAEMA President GTi 3Buttons A2 BL	UP236D9BT999A
FAEMA President GTi 3Buttons A2 BL AS	UP236D9BTG9BA
FAEMA President GTi 3Buttons A3 BL	UP336D9BT999A
FAEMA President GTi 3Buttons A3 BL AS	UP336D9BTG9BA

DATE

PROJECT

LOCATION

CUSTOMIZATION AVAILABLE

Unique design and new technology that never fails to assure great quality in every cup.

reddot award 2020 winner

FEATURES

- GTi FAEMA Thermal System (GTi)
- AutoSteam Milk 4 Cold Touch (optional)
- Tall cup version (adjustable tray)
- PGS (Perfect Grinding System)
- Green Machine
- Mixed Water
- Smart Boiler
- Bluetooth / USB Port

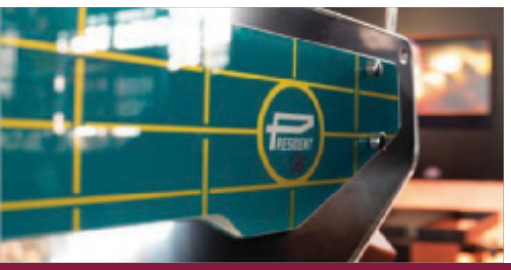

GTi with independent coffee boilers.

Absolute control and consistency in cup result. The GTi regulation with thermo-controlled and independent groups are able to manage different origins of coffee respecting the specific temperatures and the infusion times of each.

The patented Smart Boiler technology

increases the performance levels of hot water and steam while optimizing the water level in the boiler. This ensures thermal balance so you can consistently have a perfect cup even under conditions of maximum use.

AutoSteam Milk 4 (Optional)

Keep your customers coming back with perfectly prepared milk every time. The Patented Auto Steam arm gives you 4 independent recipes for milk. Each can be set to a different temperature, each to a different emulsion level, giving you total control over the drink. The system is simple and easy to use, allowing you to focus more on your guests and less on training your staff.

TECHNICAL DATA

FAEMA THE ART MACHINE

CUSTOMIZATION KITS—Back Panel

President Gti WEAVE 02

President Gti WEAVE 01

President Gti GRID 02

President Gti FOLIAGE BLACK

President Gti GRID 03

President Gti MESH 01

President Gti MESH 02

KIT CARTER GROUPS AND LEVER IN SELECT FINISHES

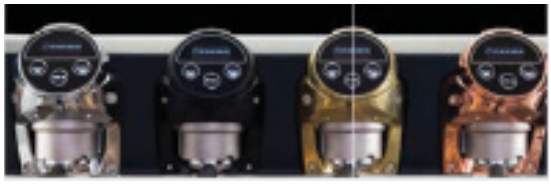
CHROME BLACK GOLD COPPER

Endless customization possibilities.

The GTi has been designed to be easily disassembled by the distributor, to respond easily to every type of customization of the machine.

Metal & wood style in perfect match between inox pewter, the wood of the filter holders and the new steam levers, and the back panel in tempered glass.

THERMOSIPHONIC PRESIDENT	A2	A3
Features		
Steam wands	2	2
Hot water wands	1	1
Hot water selections	3	3
Boiler capacity (L)	7	7
Independent coffee boilers	2	2
Capacity of each independent boiler	600 cc	600 cc
Technical Information		
Dimensions: W × D × H (in)	32.38 × 24.8 × 19.88	40.94 × 24.8 × 19.88
Weight (lbs)	170	199
Power at 220-240V~ 60Hz (W)	4300-5100	6200-7200

Water & Drain Line Requirements

Cold Water Line:
⅜" dedicated cold water line with shut-off valve and compression fitting.

Water Flow:
Minimum incoming water flow rate of 35 GPH and maximum line pressure 70PSI/5 Bar. Should flow pressure exceed 70 PSI, a pressure reducer is necessary.

Drain:
Open gravity drain of minimum 2" ID size for hose, within 4 feet of machine.

Access Hole:
There must be a 4" access hole underneath the machine to connect the water, drain and power supply. See CAD drawings for recommended hole placement.

RoHS compliant · RUV ECO TECK · TIFO · Espresso Italiano · c UL us LISTED · TÜV SÜD · CE · NSF

Receptacle
NEMA 6-50R

Espresso Soci, Inc. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice for misprints and other errors. There may be color deviations due to the printing process.

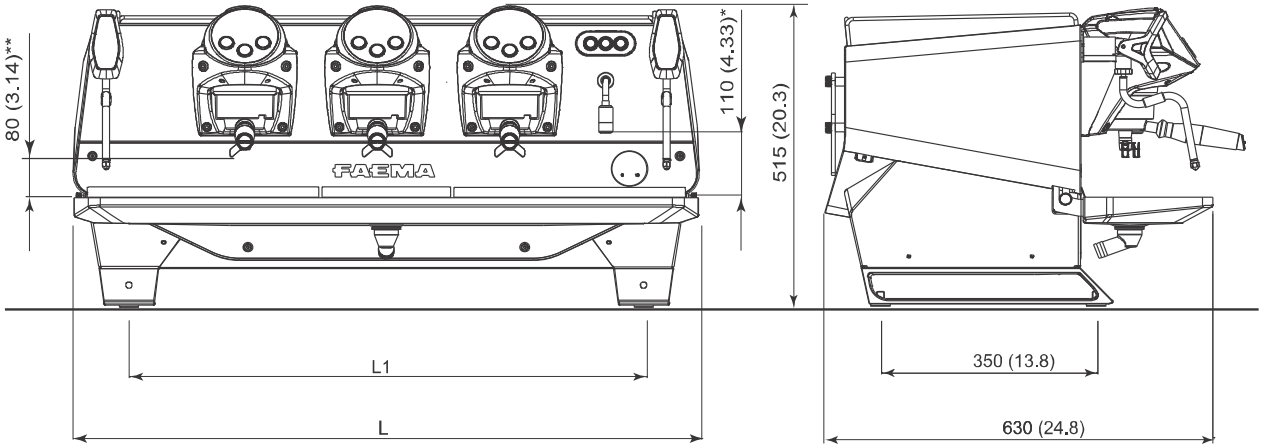

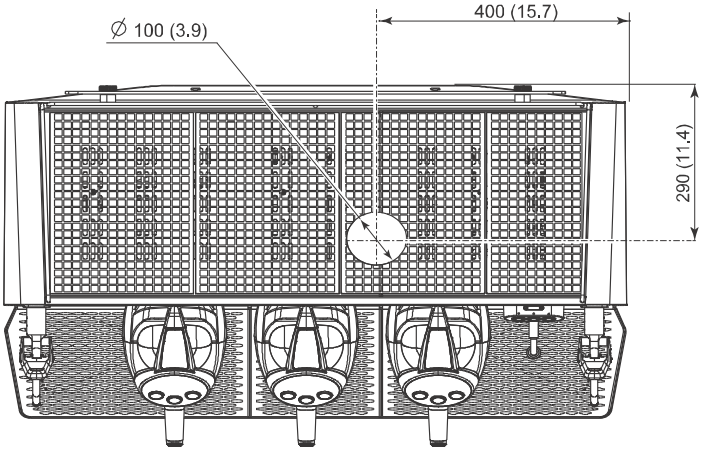

** pos.1= 80 (3.14)
pos.2= 115 (4.5)
pos.3= 140 (5.5)

* pos.1= 110 (4.33)
pos.2= 145 (5.7)
pos.3= 170 (6.7)

DIMENSIONS		2 gr.	3 gr.	4 gr.
L	mm	820	1040	1260
	inches	32.2	41	49.6
L1	mm	635	855	1075
	inches	25	33.6	42.3
Net Weight	Kg	77	90	103
	pounds	170	198	227

MACHINE	POWER SUPPLY	INSTALLED POWER	LINE POWER	SUPPLY CABLE SECTION
2 GR.	380-415V3N 50/60Hz	6,2-7,4 kW	10,4A	5x1,5 mm² or 5x2,5 mm²
	220-240V3 50/60Hz		22A	4x2,5 mm²
	220-240V 50/60Hz		31A	3x4 mm² or 3x6 mm²
3 GR.	380-415V3N 50/60Hz	7,5-8,8 kW	12,5A	5x1,5 mm² or 5x2,5 mm²
	220-240V3 50/60Hz		22A	4x2,5 mm²
	220-240V 50/60Hz		37A	3x6 mm²
4 GR.	380-415V3N 50/60Hz	8,8 - 10,4 kW	18A	5x1,5 mm² or 5x2,5 mm²
	220-240V3 50/60Hz		28A	4x2,5 mm²
	220-240V 50/60Hz		43,5A	3x6 mm²

INTERRUTTORE - Omnipolare con distanza di apertura contatti 3mm
- Protezione da corrente di dispersione con valore pari a 30 mA

MESSA A TERRA - Obbligatoria

ALLACCIAMENTO IDRAULICO - ø 3/8 gas

PRESSIONE DI ALIMENTAZIONE IDRAULICA - 0-6 bar

SCARICO IDRAULICO - ø min. 50mm

SWITCH - Omnipolar, 3mm opening contact distance
- Protection from leakage current with a value equal to 30mA

GROUNDING - Required

HYDRAULIC CONNECTION - ø 3/8 gas

HYDRAULIC FEEDING PRESSURE - 0 ÷ 6 bar (0.6 MPa)

WATER DISCHARGE - ø min. 50mm

espressosoci 219-922-7504 | espressosoci.com | *Because coffee is the most important meal of the day*